


JFB650 自润滑翻边轴套


JFB650 Metric Flanged Bearing

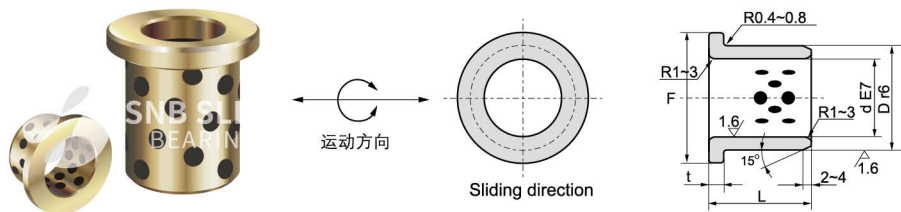

内径 E7 I.D. Ø d	外径 r6 O.D. Ø D	翻边 Flange		长度 L ^{-0.1} _{-0.3}											
		Ø F	t	10	12	15	17	18	20	23	25				
6	+0.032 +0.020	10	+0.028 +0.019	16	2	0610	0612								
8	+0.040 +0.025	12		20		0810	0812	0815							
10		14	+0.034 +0.023	22	3	1010	1012	1015	1017		1020				
12		18		25		1210	1212	1215			1220		1225		
13		19		26	3	1310	1312	1315			1320		1325		
14	+0.050 +0.032	20		27				1415			1420		1425		
15		21	+0.041 +0.028	28	3	1510	1512	1515			1520		1525		
16		22		29			1612	1615		1618	1620	1623	1625		
18		24		32	3			1815			1820		1825		
20		30		40				2015			2020		2025		
25	+0.061 +0.040	35		45	5			2515			2520		2525		
30		40		50							3020		3025		
31.5		40	+0.050 +0.034	50	5					3120					
35		45		60							3520		3525		
40	+0.075 +0.050	50		65	0					4020		4025			
45		55		70		-0.1									
50		60	+0.060 +0.041	75	7.5										
55		65		80											
60		75		90	7.5										
63		75	+0.062 +0.043	85											
65	+0.090 +0.060	80		95	7.5										
70		85		105											
75		90	+0.073 +0.051	110	10										
80		100		120											
90		110	+0.076 +0.054	130	10										
100	+0.107 +0.072	120		150											
120		140	+0.088 +0.063	170	10										
130		150	+0.090 +0.065	180											
140	+0.125 +0.085	160		190	10										
150		170	+0.093 +0.068	200											
160		180		210											

JFB650 自润滑翻边轴套 JFB650 Metric Flanged Bearing

Material	650 #+Graphite
材质	高力黄铜+石墨



d8: High load 高负荷
e7: Light load 轻负荷
f7: High precision 高精度

单位unitmm

长度 L ^{0.1} / _{0.3}									压装后内孔 I.D. After Press- Fitting	内径 I.D. Ø d
30	35	40	50	60	67.5	80	100	120	+0.016 +0.004	6
									+0.021 +0.006	8
									+0.031 +0.013	10
1230										12
1330										13
										14
1530									+0.026 +0.008	15
1630	1635	1640								16
1830	1835	1840								18
2030	2035	2040							+0.037 +0.016	20
2530	2535	2540	2550						+0.032 +0.011	25
3030	3035	3040	3050							30
3130	3135	3140								31.5
3530	3535	3540	3550						+0.046 +0.021	35
4030	4035	4040	4050							40
4530	4535	4540	4550	4560					+0.040 +0.015	45
5030	5035	5040	5050	5060					+0.055 +0.025	50
		5540		5560						55
		6040	6050	6060		6080			+0.053 +0.023	60
					6367					63
				6560						65
			7050			7080			+0.046 +0.016	70
				7560						75
				8060		8080	80100			80
				9060		9080			+0.060 +0.025	90
						10080	100100			100
						12080	120100		+0.052 +0.017	120
						13080	130100		+0.068 +0.028	130
						14080	140100			140
							150100	150120	+0.065 +0.025	150
							160100	160120		160